

Description

Heterogeneous indoor floorcovering, 5mm thick:

1: SUPERIOR PERFORMANCE AND LONGTERM SAVINGS

Omnisports is backed with a single surface embossing combined with TopClean XP™ surface treatment


2: EXTREME PROTECTION AND DURABILITY

Vinyl wear layer

3: DYNAMIC COLOURS AND REALISTIC DECORS

High definition printing for a realistic wood surface appearance and built-in units for higher colour intensity

4: NEW! EXTREME PERFORMANCE AND ENHANCED GAME EXPERIENCE

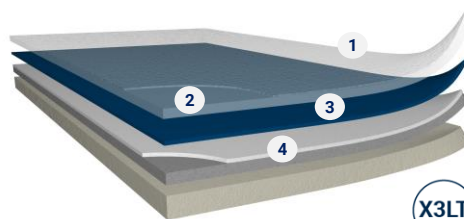

PROPERTIES	STANDARDS	OMNISPORTS TRAINING
------------	-----------	---------------------

DECLARATION OF PERFORMANCE

0120-026-DoP-2013-04

CLASSIFICATION

Type of floor covering	EN 14041	Heterogeneous indoor floorcoverings
------------------------	----------	-------------------------------------

TECHNICAL CHARACTERISTICS

Total thickness	ISO 24346 (EN 428)	5mm
Total weight	ISO 23997 (EN 430)	3600g/m ²
Width	ISO 24341 (EN 426)	2m
Length	ISO 24341 (EN 426)	20.51m

REQUIREMENTS FOR SAFE USE

Friction	EN 13036-4	80 to 110
Shock absorption	EN 14808	≥18%
Vertical deformation	EN 14809	≤1mm
Specular gloss	EN ISO 2813	≤30

TECHNICAL PERFORMANCES

Vertical ball behaviour	EN 12235	≥90%
Reaction to fire	EN 13501-1	Cfl-s1*
Resistance to wear	EN ISO 5470-1	≤1g
Resistance to indentation	Average measured value EN 1516	≤0.11mm ≤0.50mm
Resistance to a rolling load	EN 1569	-
Acoustic efficiency	EN ISO 717-2	20dB
Thermal resistance	EN ISO 14456	Approx. 0.07 m ² K/W Compatible with underfloor heating

Colors available



● Available ON DEMAND, minimum quantity: 700 m² (+/- 10%).



* glued installation on concrete

Installation and maintenance guides available on Tarkett Sports Indoor website

Technical data in force as from the date of publication (08/2022).

The values above correspond to laboratory test (no in situ test), and are subject to modifications for the benefit of further improvement.

For more detailed technical information, please contact Tarkett Sports.

Colors of the products shown in the photos or samples are indicative only. There may be differences in color, gloss and embossing structure between the products sold and photos or samples.