

Description

Heterogeneous indoor floorcovering, 2mm thick.

1: SUPERIOR PERFORMANCE AND LONGTERM SAVINGS

Omnisports is backed with a single surface embossing combined with TopClean XP™ surface treatment

2: EXTREME PROTECTION AND DURABILITY

Vinyl wear layer

3: DYNAMIC COLOURS AND REALISTIC DECORS


High definition printing for a realistic wood surface appearance and built-in unis for higher color intensity

4: OUTSTANDING DIMENSIONAL STABILITY < 0.10%:

Extremely tough single glass veil reinforcement


5: HIGH PERFORMANCE AND DURABILITY:

Homogeneous calendared sheet made from up to 60% recycled vinyl.

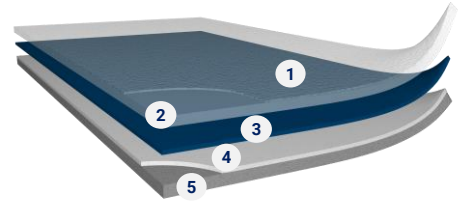

PROPERTIES	STANDARDS	OMNISPORTS COMPACT
DECLARATION OF PERFORMANCE		
0120-003-DoP-2013-04		
CLASSIFICATION		
Type of floor covering	EN 14041	Heterogeneous indoor floorcoverings
TECHNICAL CHARACTERISTICS		
Total thickness	ISO 24346 (EN 428)	2mm
Total weight	ISO 23997 (EN 430)	3045g/m ²
Width	ISO 24341 (EN 426)	2m
Length	ISO 24341 (EN 426)	231m
REQUIREMENTS FOR SAFE USE		
Friction	EN 13036-4	80 to 110
Shock absorption	EN 14808	-
Vertical deformation	EN 14809	-
Specular gloss	EN ISO 2813	≤30
TECHNICAL PERFORMANCES		
Vertical ball behaviour	EN 12235	-
Reaction to fire	EN 13501-1	Bfl-s1*
Resistance to wear	EN ISO 5470-1	-
Resistance to indentation	Average measured value EN 1516	≤0.05mm -
Resistance to a rolling load	EN 1569	-
Acoustic efficiency	EN ISO 717-2	-
Thermal resistance	EN ISO 14456	Approx. 0.02 m ² K/W Compatible with underfloor heating

Colors available

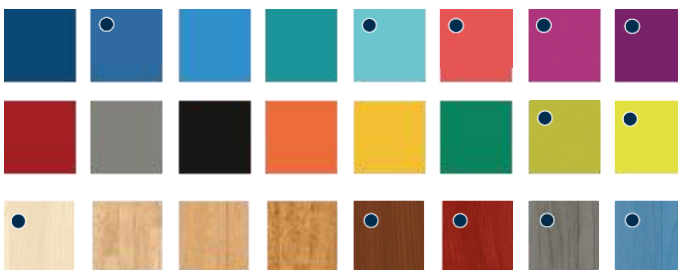

● Available ON DEMAND, minimum quantity: 700 m² (+/- 10%).



* glued installation on concrete

Installation and maintenance guides available on Tarkett Sports Indoor website

Technical data in force as from the date of publication (08/2022).

The values above correspond to laboratory test (no in situ test), and are subject to modifications for the benefit of further improvement.

For more detailed technical information, please contact Tarkett Sports.

Colors of the products shown in the photos or samples are indicative only. There may be differences in color, gloss and embossing structure between the products sold and photos or samples.